
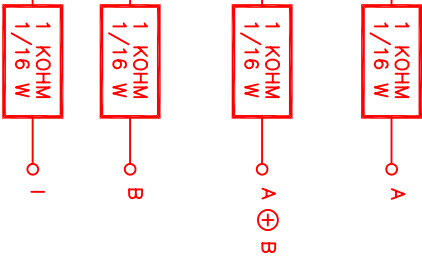
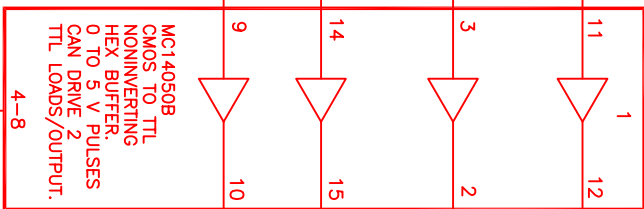
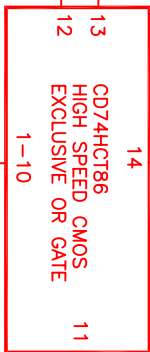


B640L3C3

INPUT VOLTAGE RANGE +5 TO +20 VDC.

CURRENT 100mA at 5V, 50mA at 6 to 20V. (Measured from 0F to 200F.)

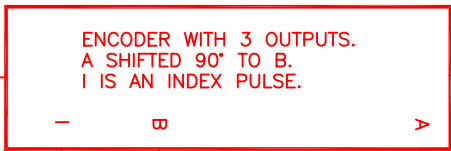

CIRCUIT GROUND (NOT GROUNDED TO CASE)

Pulse rise times 180 ns typical
Pulse fall times 50 ns typical

SCHEMATIC FOR SR/ERT SERIES ENCODERS

DATE	BY	REVISION	LOC.



**MICHIGAN
ELECTRIC CORPORATION**

08500 ANGE ROAD
CHARLEVOIX, MI 49720
PHONE: (231)547-5511 FAX: (231)547-7070

TOLERANCES		BY DATE:		SCALE:	
.XXXX ±	±	DESIGNED	2-11-00	1:1	
.XXX ±	±	DRAWN BY:			
ANGLES ±	±	KDL ERT96&98			
SURFACE	±	CHECKED			
FINISH	±	SMT OF SMTS:			
		BY:			
DRAWING NO: C337049B		MATERIAL: CUSTOMER DRAWING			